


| | |
|----------------------|------------------|
| NITRO - HVT-8 | 65948-00A |
|----------------------|------------------|

12V - 12Ah

Specially designed as a high-performance battery for motorcycles. It's characteristics is COS technology: Non leakage, high cranking, AMPS, high security and high vibration resistant.

Specifications

| | | |
|---|---|----------------|
| Voltage (C10) | 12V | |
| Capacity | 12Ah | |
| Weight | Approx. 5,3 Kgs | |
| Charging Current | 1,2A | |
| Maximum Discharge Current | 240A (5 secs) | |
| Cold Cranking AMPS (-18°C) | DIN Norm | 200A |
| | SAE Norm | 360A |
| Operation Temperature Range | Discharge | -20°C to 50°C |
| | Charge | 0°C to 40°C |
| | Storage | -20°C to -40°C |
| Nominal Operation Temperature Range | 25+/-3°C | |
| Recommended Maximum Charging Current Limit | 3,6A | |
| Equalization and Cycle Service | 14,8 VDC/unit avg. At 25°C | |
| Self Discharge | Batteries can be stored for 6 months at 25°C. Please charge batteries before using. At higher temperatures the Self Discharge will be faster. | |
| Dimensions (in mm) | L:149 W:87 H:145 | |

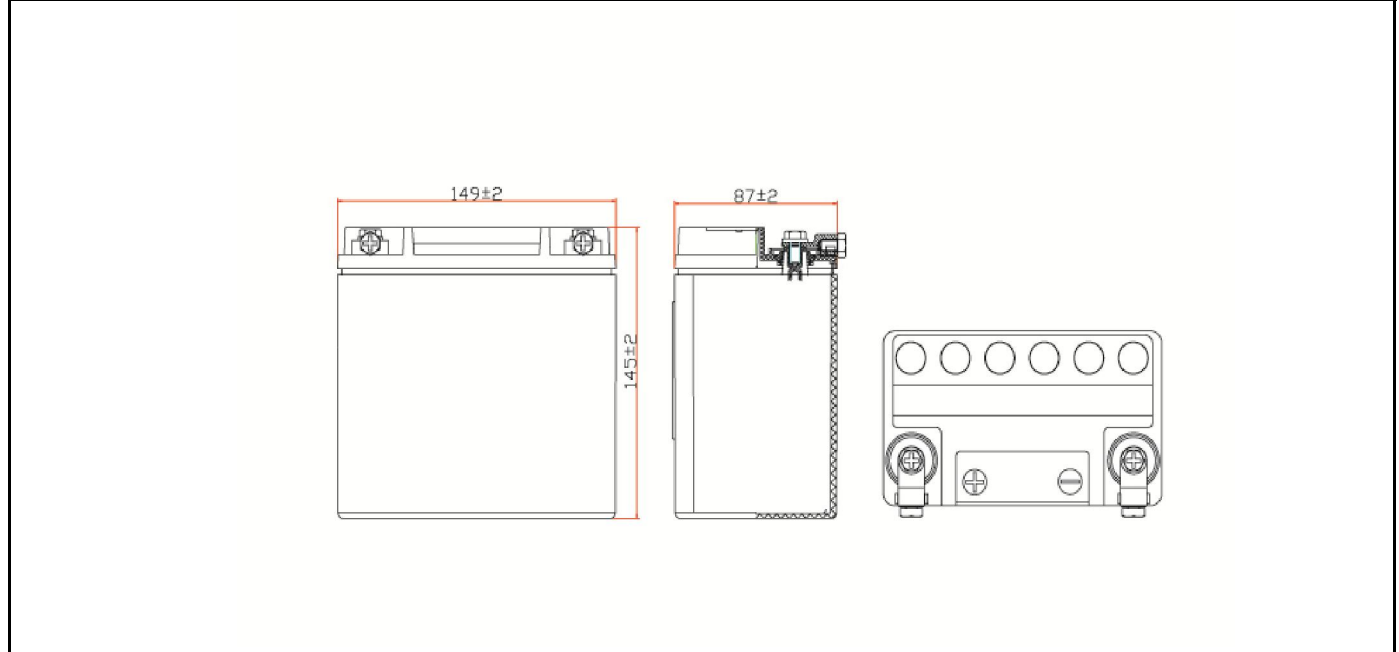

| | | | |
|---------|----------|----|----|
| ISO9001 | ISO14001 | UL | CE |
|---------|----------|----|----|