


NITRO - HVT-10	66006-29F
-----------------------	------------------

6V - 22Ah

Specially designed as a high-performance battery for motorcycles. It's characteristics is COS technology: Non leakage, high cranking, AMPS, high security and high vibration resistant.

Specifications

Voltage (C10)	6V	
Capacity	22Ah	
Weight	Approx. 4,7 Kgs	
Charging Current	2,2A	
Maximum Discharge Current	NA	
Cold Cranking AMPS (-18°C)	DIN Norm	N/A
	SAE Norm	N/A
Operation Temperature Range	Discharge	-20°C to 50°C
	Charge	0°C to 40°C
	Storage	-20°C to -40°C
Nominal Operation Temperature Range	25+/-3°C	
Recommended Maximum Charging Current Limit	6,6A	
Equalization and Cycle Service	14,8 VDC/unit avg. At 25°C	
Self Discharge	Batteries can be stored for 6 months at 25°C. Please charge batteries before using. At higher temperatures the Self Discharge will be faster.	
Dimensions (in mm)	L:115 W:100 H:214	

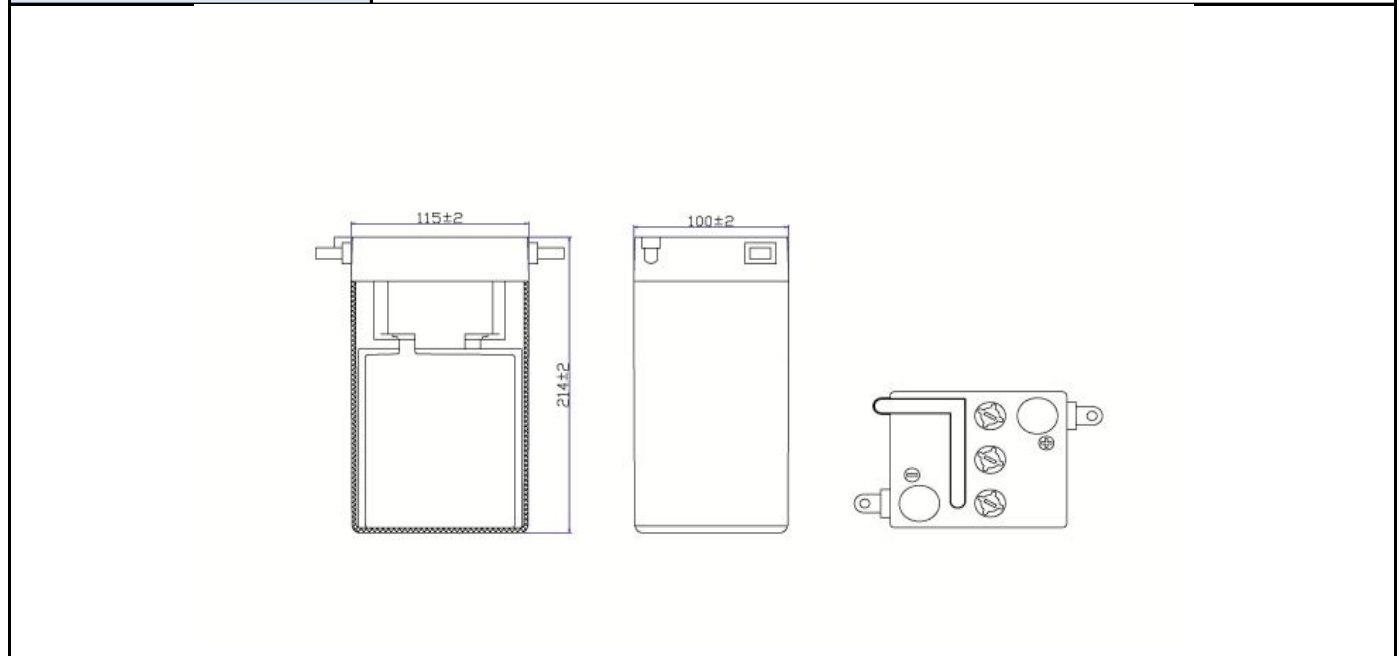

ISO9001	ISO14001	UL	CE
----------------	-----------------	-----------	-----------