


<b>NITRO - HVT-5</b>	<b>65991-82B</b>
----------------------	------------------

**12V - 19Ah**

Specially designed as a high-performance battery for motorcycles. It's characteristics is COS technology: Non leakage, high cranking, AMPS, high security and high vibration resistant.

**Specifications**

<b>Voltage (C10)</b>	12V	
<b>Capacity</b>	19Ah	
<b>Weight</b>	Approx. 8 Kgs	
<b>Charging Current</b>	1,9A	
<b>Maximum Discharge Current</b>	380A (5 secs)	
<b>Cold Cranking AMPS (-18°C)</b>	DIN Norm	240A
	SAE Norm	430A
<b>Operation Temperature Range</b>	<b>Discharge</b>	-20°C to 50°C
	<b>Charge</b>	0°C to 40°C
	<b>Storage</b>	-20°C to -40°C
<b>Nominal Operation Temperature Range</b>	25+/-3°C	
<b>Recommended Maximum Charging Current Limit</b>	5,7A	
<b>Equalization and Cycle Service</b>	14,8 VDC/unit avg. At 25°C	
<b>Self Discharge</b>	Batteries can be stored for 6 months at 25°C. Please charge batteries before using. At higher temperatures the Self Discharge will be faster.	
<b>Dimensions (in mm)</b>	L:174 W:99 H:154	

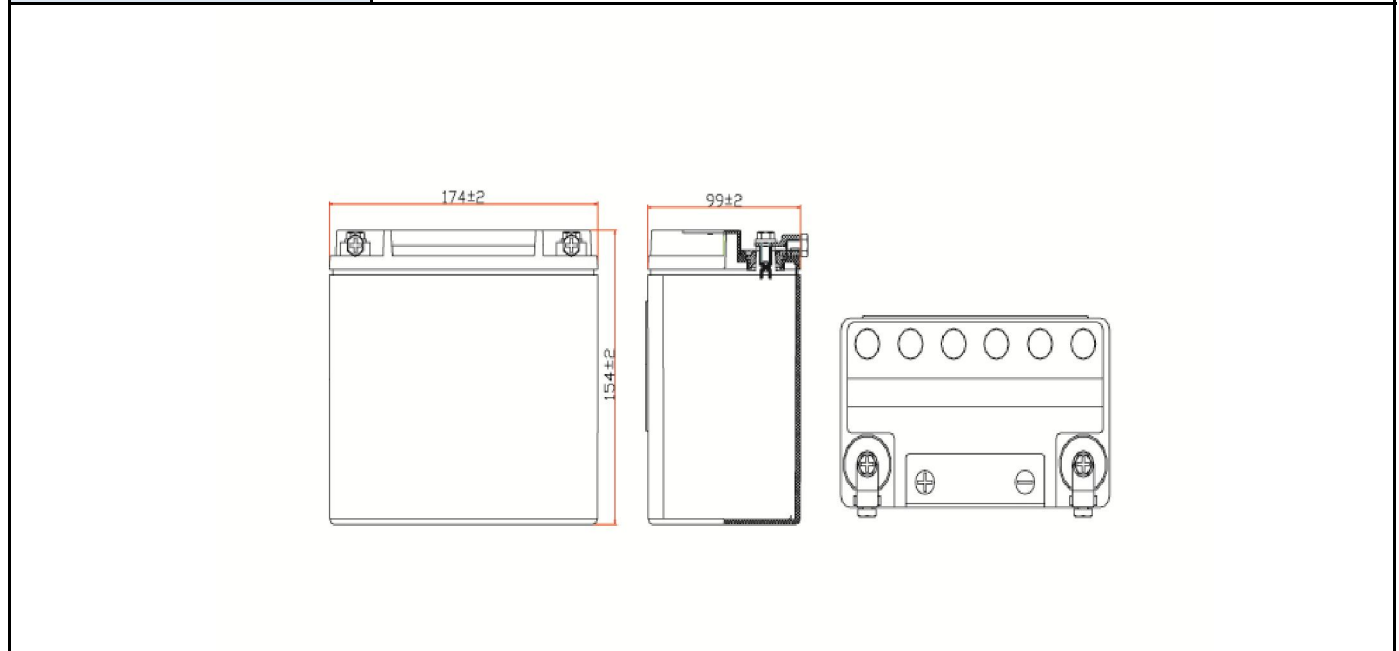

<b>ISO9001</b>	<b>ISO14001</b>	<b>UL</b>	<b>CE</b>
----------------	-----------------	-----------	-----------